



MSP 110L

2nd Generation

Solar Module
110W | 20,4V | Monocrystalline




Electrical Specifications

Rated power	110W
Rated voltage (U _{mp})	20.4V
Rated current (I _{mp})	5.39A
Open-circuit voltage (U _{oC})	23.9V
Short-circuit current (I _{sc})	5.72A
Efficiency	18.97%

Technical Specifications

Temperature range	- 40°C to + 85°C
Solar cells	Monocrystalline
Number of cells	36
Dimensions	1050 × 540 × 30mm
Weight	5.72kg
Junction box	IP65 rated
Glass (front)	Hardened safety glass
Frame	Stable, hollow-section aluminium frame
Cable length	790mm
Connectors	MC4

Dimensions

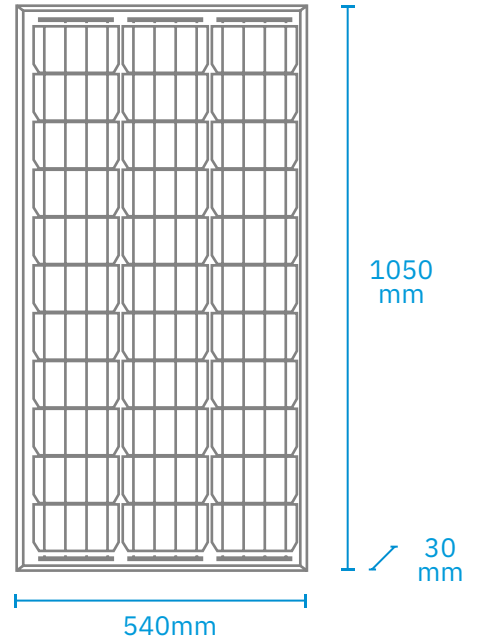

Warranty*



*80% of rated power: 5 years, 70% of rated power: 15 years

The perfect solar charge controller for your project

Charge your batteries efficiently, safely and quickly with an ECTIVE solar charge controller. Use this overview to find out which controller best suits your project, depending on how many solar panels you intend to use:

1 panel



DSC 12

2 panels



SC 20

3 panels



DSC 25

4 panels



SC 40